



IADC WellCAP Well Control Worksheet

Subsea Stack - Wait and Weight Method

Well Name: _____ Completed By: _____ Date: ____ / ____ / ____

PRE-RECORDED INFORMATION

TRUE PUMP OUTPUT: _____ **X** _____ **=** _____
Liters/Stk @ 100% % Efficiency TPO (Liters/Stk)

Surface : _____ (Liters) **÷** _____ **=** _____
 Line Surface Line Capacity True Pump Output (Liters/Stk) Strokes to Pump

DRILL STRING CAPACITY:

Drill #1: _____ **X** _____ **=** _____ Liters
 Pipe Size (mm) Weight (kg/m) Liters/m Length (m) DP

Drill #2: _____ **X** _____ **=** _____ Liters
 Pipe Size (mm) Weight (kg/m) Liters/m Length (m) DP

HWDP : _____ **X** _____ **=** _____ Liters
 Size (mm) Weight (kg/m) Liters/m Length (m) HWDP

Drill #1: _____ **X** _____ **=** _____ Liters
 Collars Size (mm) Weight (kg/m) Liters/m Length (m) DC

Drill #2: _____ **X** _____ **=** _____ Liters
 Collars Size (mm) Weight (kg/m) Liters/m Length (m) DC

STROKES FROM SURFACE TO BIT:

_____ **÷** _____ **=** _____
Total Drill String Capacity (Liters) True Pump Output (Liters/Stks) Strokes, Surface to Bit

ANNULAR CAPACITY

Between CSG and DP: _____ Liters/m **X** _____ m **=** _____ Liters

Between Liner #1 and DP: _____ Liters/m **X** _____ m **=** _____ Liters

Between Liner #2 and DP: _____ Liters/m **X** _____ m **=** _____ Liters

Between OH and DP/HWDP: _____ Liters/m **X** _____ m **=** _____ Liters

Between OH and DC: _____ Liters/m **X** _____ m **=** _____ Liters

Choke line capacity: _____ Liters/m **X** _____ m **=** _____ Liters

STROKES FROM BIT TO SHOE:

_____ **÷** _____ **=** _____
Open Hole Annular Vol. (Liters) True Pump Output (Liters/Stks) Strokes, Bit to Shoe

STROKES FROM BIT TO SURFACE:

_____ **÷** _____ **=** _____
Total Annular Volume (Liters) True Pump Output (Liters/Stks) Strokes, Bit to Surface

ANNULAR VOL. BETWEEN DRILL PIPE & RISER:

(_____ - _____) **÷** 1273 **=** _____
Riser ID² Drill Pipe OD² Capacity Drill Pipe/Riser (Liters/m)

_____ **X** _____ m **=** _____
Capacity Drill Pipe/Riser (Liters/m) Riser Length Volume between Drill Pipe & Riser (Liters)

STROKES TO DISPLACE RISER:

_____ **÷** _____ **=** _____
Volume between Drill Pipe & Riser (Liters) True Pump Output (Liters/Stks) Strokes

CURRENT WELL DATA

PRESENT MUD WEIGHT: _____ kg/l

SLOW CIRCULATION RATE (SCR):

SCR taken @ _____ (m)

| | Stks/min | Pressure(bar) | Liter/min | Pressure(bar) |
|---------|----------|---------------|-----------|---------------|
| Pump #1 | | | | |
| Pump #2 | | | | |
| Pump #3 | | | | |

CASING DATA:

CASING _____ size , _____ ID , weight

SHOE DEPTH @ MD / TVD _____ / _____ m

SHOE TEST DATA:

Depth #1 _____ @ Test MW of _____
 (bar) (kg/l)

Depth #2 _____ @ Test MW of _____
 (bar) (kg/l)

Depth #3 _____ @ Test MW of _____
 (bar) (kg/l)

LINER #1 _____ size , _____ ID , weight

LINER #2 _____ size , _____ ID , weight

LINER #1 TOP DEPTH _____ m

LINER #2 TOP DEPTH _____ m

LINER #1 SHOE DEPTH _____ m

LINER #2 SHOE DEPTH _____ m


TVD CASING or LINER _____ m

HOLE DATA:

TOTAL DEPTH (MD) _____ m

TOTAL DEPTH (TVD) _____ m

BIT DEPTH @ MD / TVD _____ / _____ m

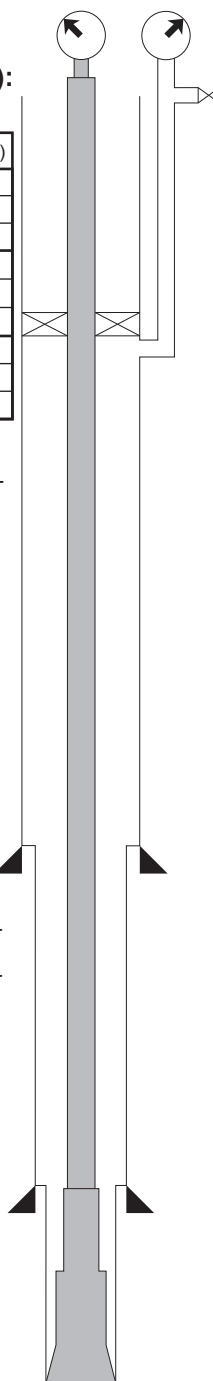


KICK DATA

SIDPP: _____ bar SICP: _____ bar PIT GAIN: _____ Liters Time of Incident: ____ : ____

DISCLAIMER: This Well Control Worksheet is intended solely for the use of the IADC and IADC accredited schools and organizations engaging in the teaching of the IADC WellCAP Well Control classes. The IADC, its employees or others acting on its behalf, makes no warranties or guarantees expressed, implied or statutory, as to any matter whatsoever, with respect to the use of this Well Control Worksheet.

GRAPHIC ANALYSIS

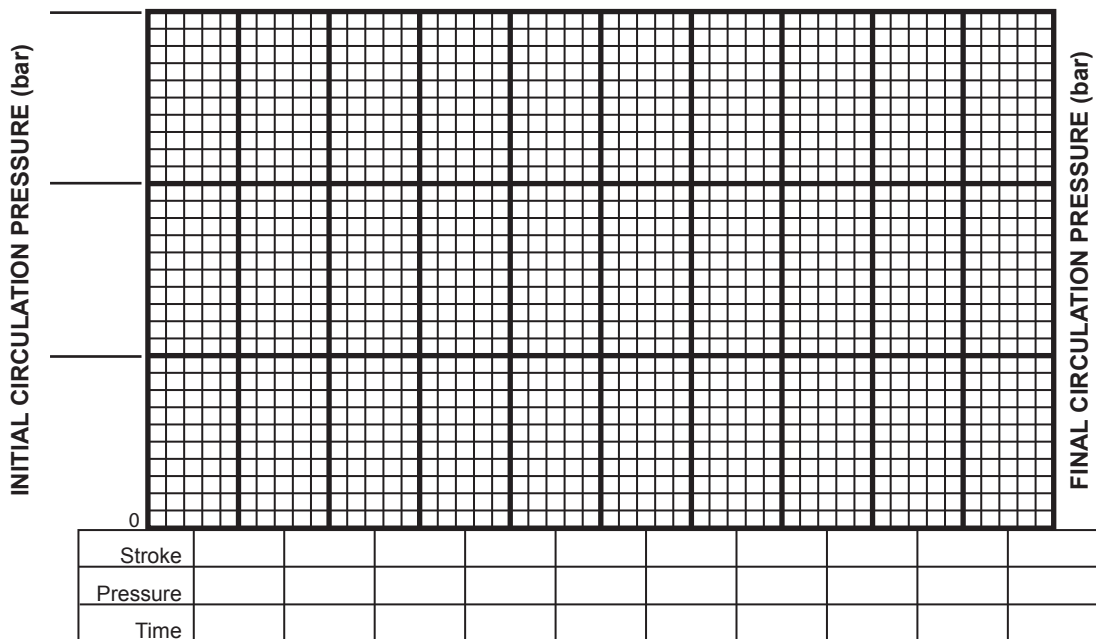

1. Pressure Gradient (bar/m) = Fluid Density (kg/l) ÷ 10.2
2. Hydrostatic Pressure (bar) = Fluid Density (kg/l) x TVD (m) ÷ 10.2
3. Capacity (l/m) = Inside Diameter² (mm) ÷ 1273
4. Annular Capacity(l/m) = (Inside Diameter of Casing² (mm) or Hole Diameter²(mm) - Outside Diameter of Pipe² (mm)) ÷ 1273
5. Pipe Displacement (l/m) = (Outside Diameter of pipe² (mm) - Inside Diameter of pipe² (mm)) ÷ 1273
6. Maximum Allowable Fluid Density (kg/l) = $\frac{\text{Surface LOT Pressure (bar)} \times 10.2}{\text{Shoe TVD (m)}} + \text{LOT Fluid Density (kg/l)}$
7. MAASP (bar) = [(Maximum Allowable Fluid Density (kg/l) - Current Fluid Density (kg/l)) x Shoe TVD (m)] ÷ 10.2
8. Pressure Drop per Metre Tripping Dry Pipe (bar/m) = $\frac{\text{Drilling Fluid Density (kg/l)} \times \text{Metal Displacement (l/m)}}{[\text{Riser/Casing Capacity (l/m)} - \text{Metal Displacement (l/m)}] \times 10.2}$
9. Pressure Drop per Foot Tripping Wet Pipe (bar/m) = $\frac{\text{Drilling Mud Weight (kg/l)} \times 10.2 \times \text{Closed End Displacement (l/m)}}{\text{Casing Capacity (l/m)} - \text{Closed End Displacement (l/m)}}$
10. Formation Pressure (bar) = Hydrostatic Pressure Mud in Hole (bar) + SIDPP (bar)
11. Equivalent Circulating Density (kg/l) = $\frac{\text{Annular Pressure Loss (bar)} \times 10.2}{\text{TVD (m)}} + \text{Fluid Density (kg/l)}$
12. Kg of Barite Needed to Weight-Up Mud = $\frac{\text{Liters of Mud in System} \times 4.25 \times (\text{KMW} - \text{OMW})}{(4.25 - \text{KMW})}$
13. Volume Increase from Adding Barite (l) = $\frac{\text{Kg of Barite Needed to Weight-Up Mud}}{4.25}$
14. Estimated New Pump Pressure at New Pump Rate (bar) = Old Pump Pressure (bar) x $\left[\frac{\text{New Pump Rate (SPM)}}{\text{Old Pump Rate (SPM)}} \right]^2$
15. Estimated New Pump Pressure with New Mud Weight (bar) = Old Pump Pressure (bar) x $\frac{\text{New Mud Weight (kg/l)}}{\text{Old Mud Weight (kg/l)}}$

DISCLAIMER: This Well Control Worksheet is intended solely for the use of the IADC and IADC accredited schools and organizations engaging in the teaching of the IADC WellCAP Well Control classes. The IADC, its employees or others acting on its behalf, makes no warranties or guarantees expressed, implied or statutory, as to any matter whatsoever, with respect to the use of this Well Control Worksheet.